



## MET-TRACK® REACH

RIGID RAIL ANCHOR SYSTEMS

Metreel's **MET-TRACK® REACH** Fall Arrest Track system provides protection with coverage of up to 30 degrees from vertical.

The complete system can be maneuvered in minutes with the aid of a large forklift and leveled using the provided leveling jacks. Alternatively, a towable wheeled option is also available.

**Typically used in outdoor locations, the enclosed track design prevents dirt accumulation ensuring the trolley effortlessly follows the user(s) to traverse safely along the systems' length.**

### Size Options

- Standard Track lengths from 20' to 60'
- Standard arm reach 8', 10' and 12'
- Trolley-hook height is 22'

### Typical Applications

- Truck Loading
- Manufacturing & Maintenance of large vehicles
- Aircraft

### Application Options

- Single or dual tracks for use by up to two users

### Design

**MET-TRACK®** attached to outrigger arms supported by tie rods, cross braces, masts and counterweights.

### Support Structures

**MET-TRACK®** is held out by outrigger arms from two support columns attached to one of the following bases:

- Standard skid-mounted base, or
  - Optional steerable wheeled chassis base
- Advantages
- Ideal for non-permanent applications
  - Indoors or Outdoors
  - Fully assembled system – Can be lifted with a Forklift or rolled/towed

### Towable MET-TRACK® REACH is supplied with:

- Non-pneumatic tires
- Steerable rolling chassis
- Drawbar Eye Coupler
- Bubble levels, leveling jacks, bottle jack and bottle jack plate for system leveling

### Towable MET-TRACK® REACH Options

- Custom sizes and configurations available
- Dual steer with two tow bars, one on each end of the system

### MET-TRACK® REACH

RIGID RAIL ANCHOR SYSTEMS

#### TO QUOTE YOU NEED:



Worker Capacity: 1  2   
 For more than two worker access please contact the MET-TRACK sales line.

Worker Passability: 1  2


Track Length (TL):  Feet

Arm Reach (AR):  Feet


Trolley Hook Height (THH):  Feet

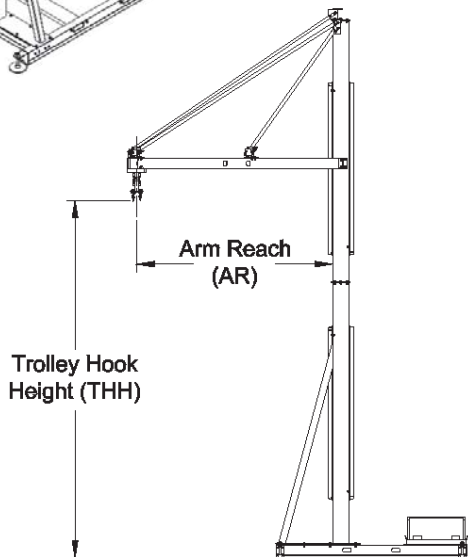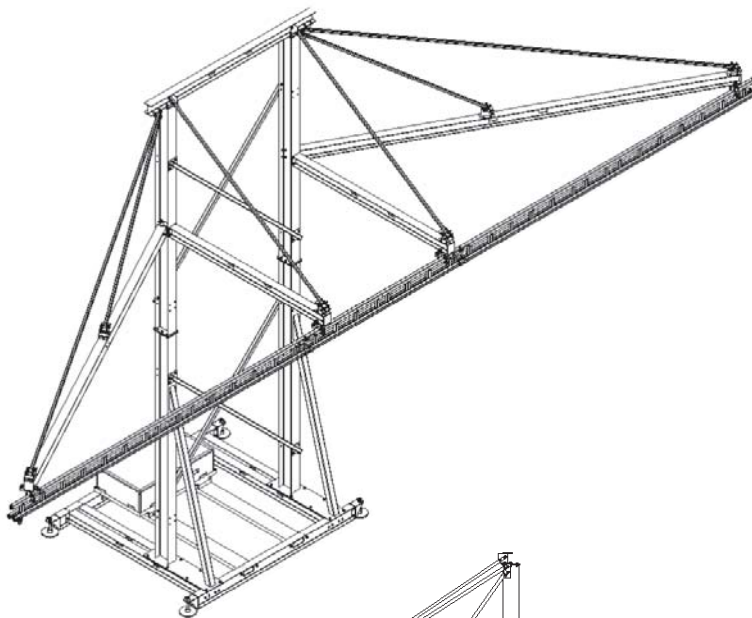

SIDE VIEW

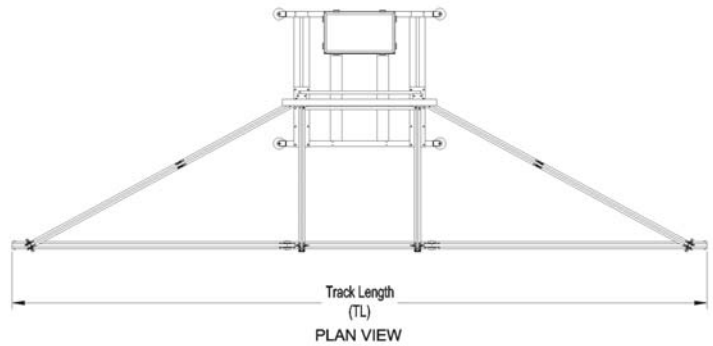

PLAN VIEW

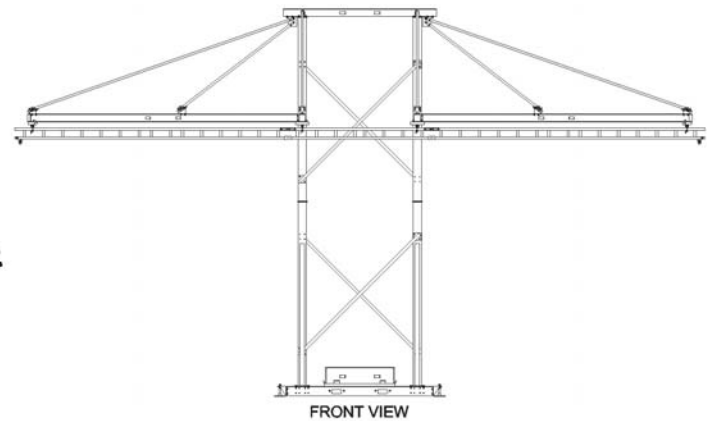

FRONT VIEW

WORKER CAPACITY	PASSABLE	TRACK LENGTH	TROLLEY HOOK HEIGHT	ARM REACH	PART NUMBER	
					SKIDDED	TOWABLE
1	No	20'	22'	8'	STR-10820	STW-10820
				10'	STR-11020	STW-11020
				12'	STR-12220	STW-12220
1	No	30'	22'	8'	STR-10830	STW-10830
				10'	STR-10830	STW-10830
				12'	STR-10830	STW-10830
1	No	40'	22'	8'	STR-10840	STW-10840
				10'	STR-10840	STW-10840
				12'	STR-10840	STW-10840
1	No	50'	22'	8'	STR-10850	STW-10850
				10'	STR-10850	STW-10850
				12'	STR-10850	STW-10850
1	No	60'	22'	8'	STR-10860	STW-10860
				10'	STR-10860	STW-10860
				12'	STR-10860	STW-10860
2	Yes	20'	22'	8'	STR-20820	STW-20820
				10'	STR-21020	STW-21020
				12'	STR-21220	STW-21220
2	Yes	30'	22'	8'	STR-20830	STW-20830
				10'	STR-21030	STW-21030
				12'	STR-21230	STW-21230
2	Yes	40'	22'	8'	STR-20840	STW-20840
				10'	STR-21040	STW-21040
				12'	STR-21240	STW-21240
2	Yes	50'	22'	8'	STR-20850	STW-20850
				10'	STR-21050	STW-21050
				12'	STR-21250	STW-21250
2	Yes	60'	22'	8'	STR-20860	STW-20860
				10'	STR-21060	STW-21060
				12'	STR-21260	STW-21260